



osnovne informacije

- Pneumatski razvodnici 4A serije su klipnog tipa.
- Aktiviranje razvodnika je direktno pneumatsko.
- Odlikuju se brзом reakcijom.
- Po funkciji mogu biti 5/2 i 5/3.
- 5/2 razvodnici sa dva magneta imaju bistabilnu memorijsku funkciju.
- Mogu raditi i sa nezauljenim vazduhom.
- Pogodni su za montažu na zajedničku podnožnu ploču.



označavanje

4A - 3 10 - 08

1 2 3

1	Veličina:	2	Simbol:	3	Navojni otvor
	200	10		06	G1/8
	300	20		08	G1/4
	400	30C		10	G3/8
		30E		15	G1/2



tehničke informacije

tehnické informácie

	SERIJA 4A-200			
Oznaka	4A-210-06	4A-220-06	4A-230C-06	4A-230E-06
Priključni navoji	G1/8			
Radni fluid	Komprimovani vazduh zauljen/nezauljen			
Sastav kompleta	Razvodnik			
Tip razvodnika	5/2 monostabilan	5/2 bistabilan	5/3 blokiran u neutrali	5/3 rasterećen u neutrali
Poprečni presek protočnog otvora	14mm ² (Cv=0,78)		12mm ² (Cv=0,67)	
Radni pritisak	0 do 8 bar			
Max pritisak	12 bar			
Radna temperatura	od -5 do 70°C			




crtež


Pneumatski razvodnici

4A200 serija
 4A300 serija
 4A400 serija


4A 210-06

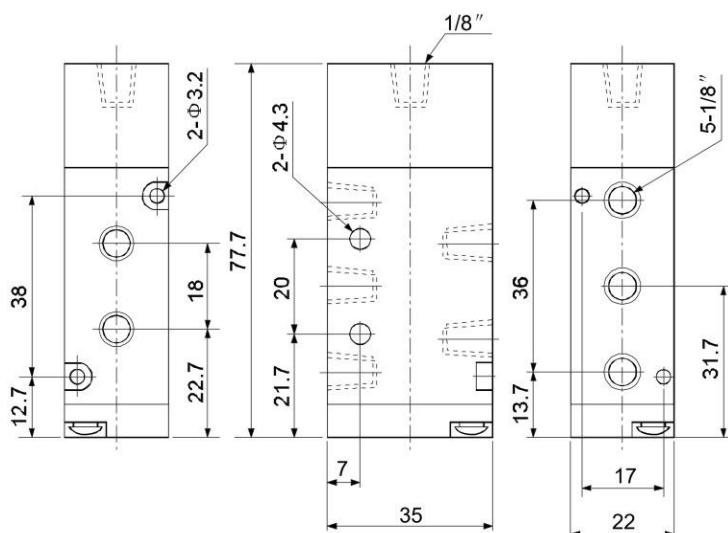


4A 220-06

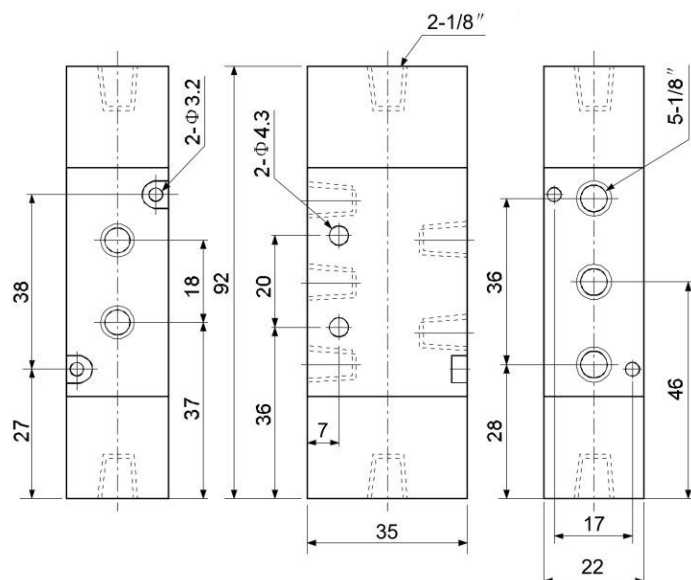

4A 230-06

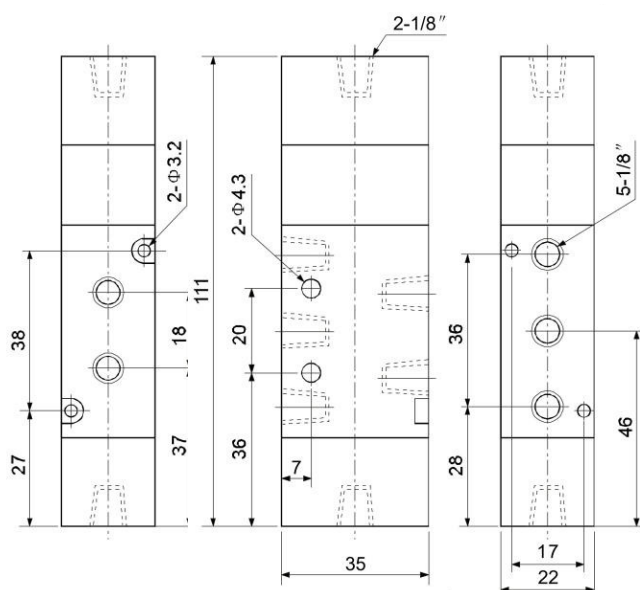

Dijagram protoka

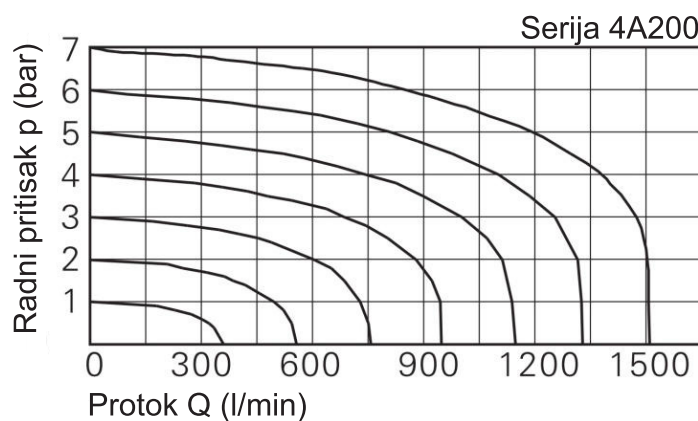




tehničke informacije


tehničke informacije

	SERIJA 4A-300			
Oznaka	4A-310-08	4A-320-08	4A-330C-08	4A-330E-08
Priključni navoji	G1/4			
Radni fluid	Komprimovani vazduh zauljen/nezauljen			
Sastav kompleta	Razvodnik			
Tip razvodnika	5/2 monostabilan	5/2 bistabilan	5/3 blokiran u neutrali	5/3 rasterećen u neutrali
Poprečni presek protočnog otvora	25mm ² (Cv=1,40)		18mm ² (Cv=1,00)	
Radni pritisak	0 do 8 bar			
Max pritisak	12 bar			
Radna temperatura	od -5 do 70°C			


4A 310-08

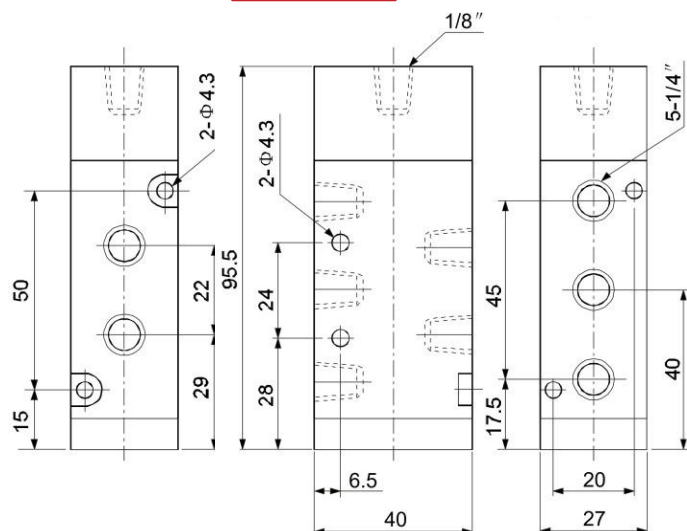


4A 320-08

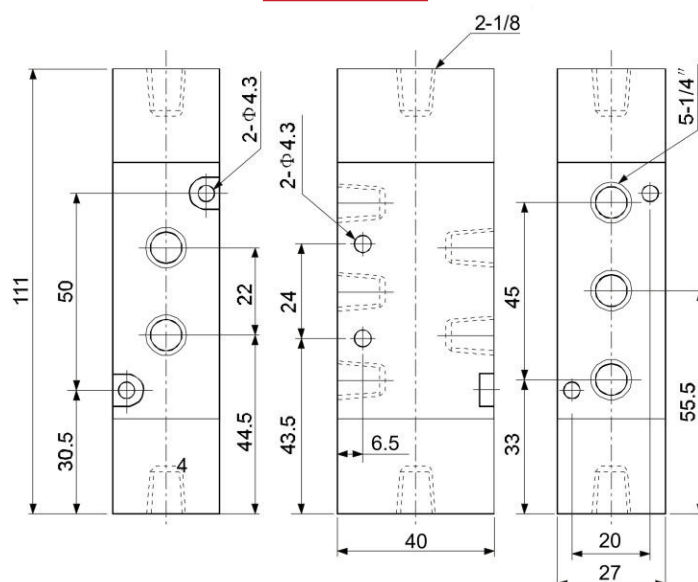

4A 330-08

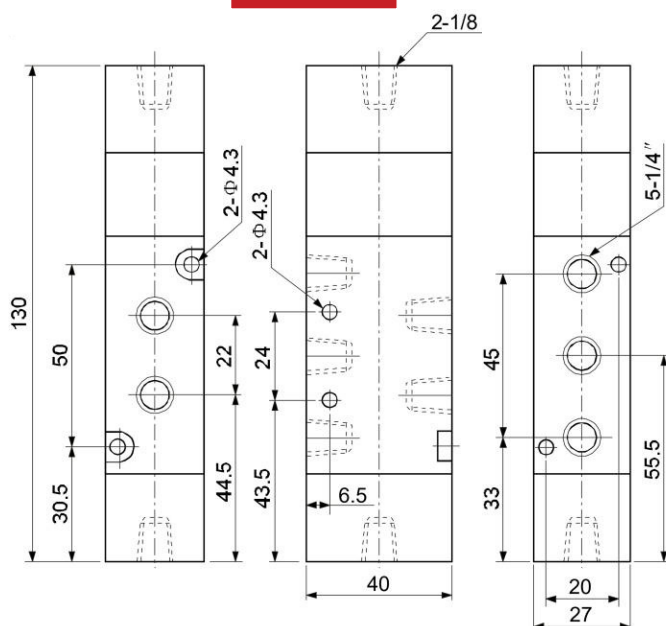

Dijagram protoka

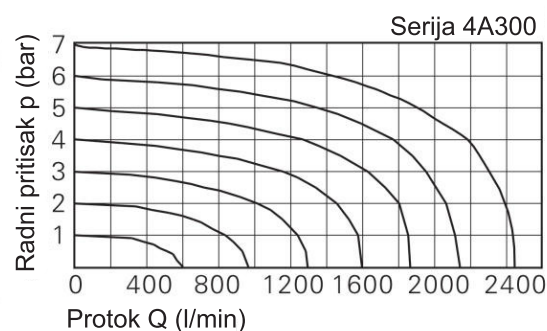




tehničke informacije


tehničke informacije

	SERIJA 4A-400			
Oznaka	4A-410-15	4A-420-15	4A-430C-15	4A-430E-15
Priključni navoji	G1/2			
Radni fluid	Komprimovani vazduh zauljen/nezauljen			
Sastav kompleta	Razvodnik			
Tip razvodnika	5/2 monostabilan	5/2 bistabilan	5/3 blokiran u neutrali	5/3 rasterećen u neutrali
Poprečni presek protočnog otvora	50mm ² (Cv=2,79)		30mm ² (Cv=1,68)	
Radni pritisak	0 do 8 bar			
Max pritisak	12 bar			
Radna temperatura	od -5 do 70°C			


4A 410-15

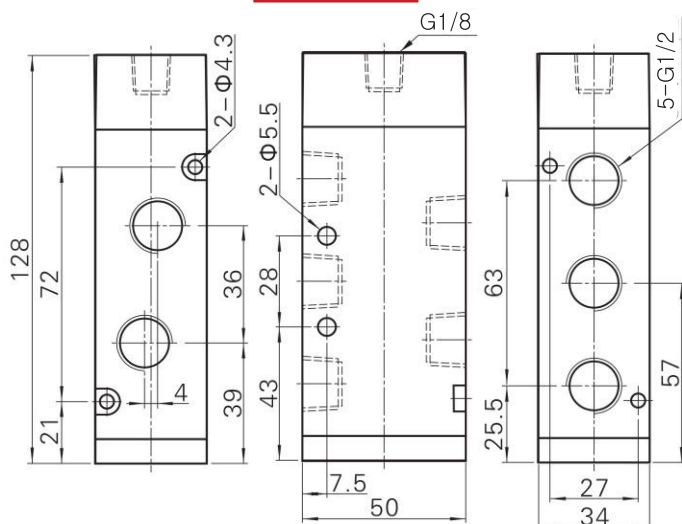

4A 420-15

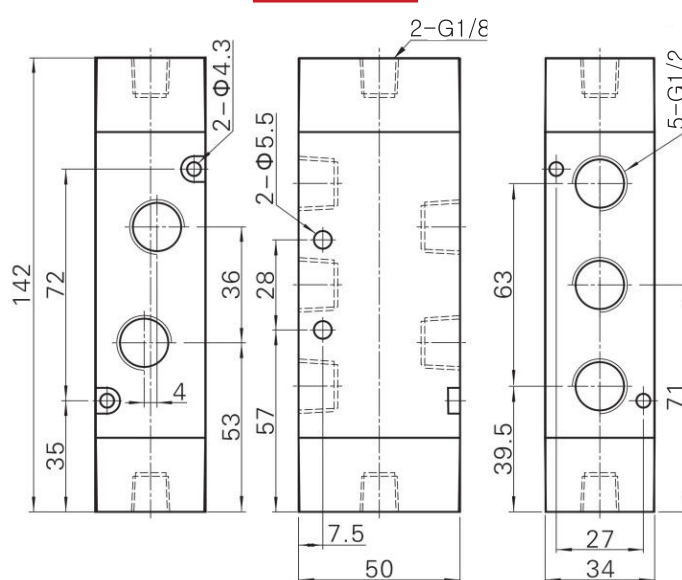

4A 430-15

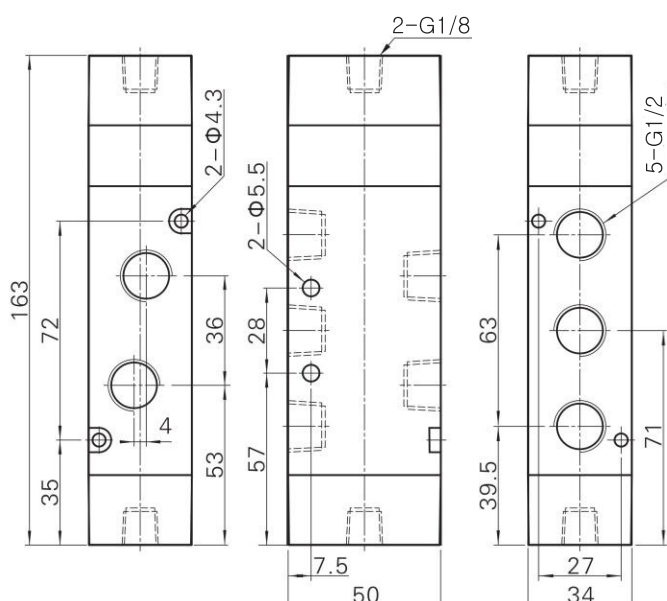

Dijagram protoka

