




osnovne informacije

- Pneumatski vibrator turbinskog tipa sa masenim deblansom
- Jednostavni za montažu i instalaciju
- Frekvenciju i amplitudu vibracija moguće je podešavati kombinacijom pritiska i protoka vazduha
- Odlikuju se niskim nivoom buke (od 60 do 75 dB)
- Pogodni su za rad sa nezauljenim vazduhom u prehrambenoj i farmaceutskoj industriji
- Plastificirano kućište otporno na koroziju



crtež

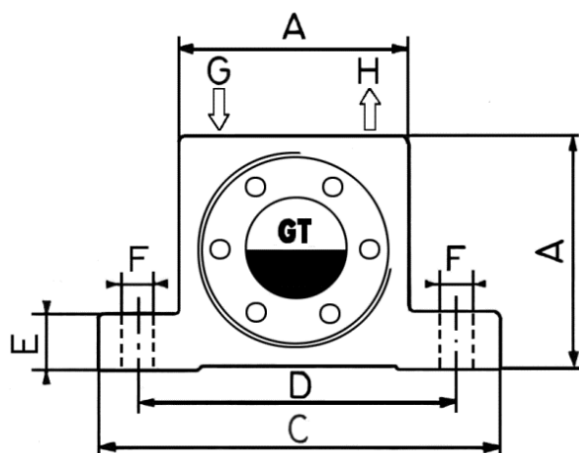

dimenzije

MODEL	A	B	C	D	E	F	G/H	masa (gr)
GT 6	40	28	70	56	10	6	1/8"	161
GT 8	50	33	86	68	12	7	1/8"	255
GT 10	50	33	86	68	12	7	1/8"	258
GT 13	65	42	113	90	16	9	1/4"	555
GT 16	65	42	113	90	16	9	1/4"	566
GT 20	80	56	128	104	16	9	1/4"	1076
GT 25	80	56	128	104	16	9	1/4"	1112
GT 30	100	73	160	130	20	11	3/8"	2201
GT 36	100	73	160	130	20	11	3/8"	2301
GT 40	120	83	194	152	24	17	3/8"	3696



tehničke informacije

MODEL	FREKVENCIJA n/min			CENTRIFUGALNA SILA N			POTROŠNJA VAZDUHA l/min		
	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar
GT 6	11.500	12.000	12.500	130	175	210	33	58	83
GT 8	36.000	42.000	46.000	990	2060	2.800	46	80	112
GT 10	27.500	35.000	37.500	840	1.390	2.400	46	80	112
GT 13	26.000	30.000	33.000	1.400	2.440	3.730	120	200	290
GT 16	17.000	21.500	24.000	1.220	2.090	3.160	120	200	290
GT 20	17.000	20.000	23.000	2.170	4.040	5.520	185	325	455
GT 25	12.000	15.500	17.000	2.120	3.510	5.070	185	325	455
GT 30	13.000	14.000	16.000	3.380	5.430	7.540	330	530	745
GT 36	8.000	10.000	13.000	3.290	5.000	7.190	330	530	745
GT 40	7.700	8.800	9.500	4.300	7.300	9.800	425	700	970