



osnovne informacije

- Elektromagnetni razvodnici 3V serije su klipnog tipa.
- Aktiviranje razvodnika je posredno preko pilot ventila.
- Odlikuju se brзом reakcijom.
- Po funkciji su 3/2 razvodnici.
- Mogu raditi i sa nezauljenim vazduhom.
- Opremljeni su dugmetom za pomoćno ručno aktiviranje.

označavanje

3V - 3 10 - 08 - 24 VDC

1

2

3

4

4

Napon:

12 VDC

24 VDC

24 VAC

110 VAC

220 VAC

1

Veličina:


200

300

400

2

Simbol:



3

Navojni otvor

06

G1/8

08

G1/4

15

G1/2



tehničke informacije


 **tehničke informacije**

	SERIJA 4V-200				
Oznaka	3V-210-06	3V-310-08	3V-410-15		
Priključni navoji	G1/8	G1/4	G1/2		
Radni fluid	Komprimovani vazduh zauljen/nezauljen				
Sastav kompleta	Razvodnik; elektromagnet; utičnica DIN 43650B				
Tip razvodnika	3/2 monostabilan				
Poprečni presek protočnog otvora	14mm ² (Cv=0,78)	25mm ² (Cv=1,39)	50mm ² (Cv=2,79)		
Radni pritisak	1,5 do 8 bar				
Max pritisak	12 bar				
Radna temperatura	od -5 do 70°C				
Napon magneti	220 VAC	110 VAC	24 VAC	24 VDC	12 VDC
Odstupanje napona	AC ±15%			DC ±10%	
Snaga magneti	4,5 VA	4,5 VA	4,5 VA	3 W	3 W
Klasa zaštite	IP 65 (DIN 40050)				
Vreme aktiviranja	0,05 s				




crtež

3V 210-06

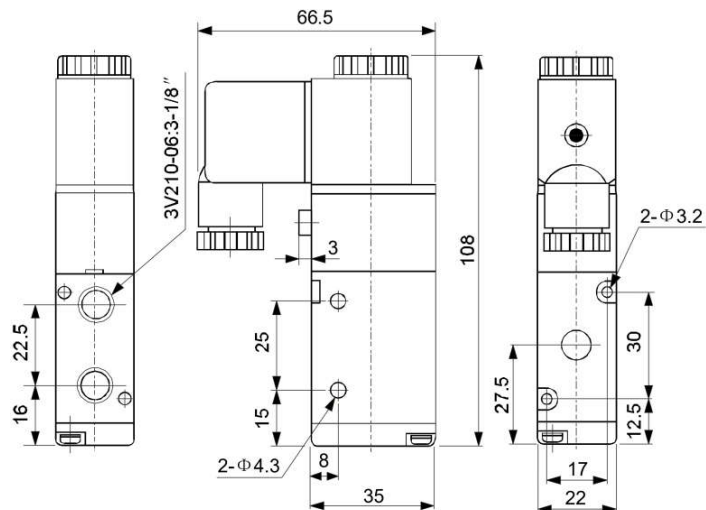

3V 310-08

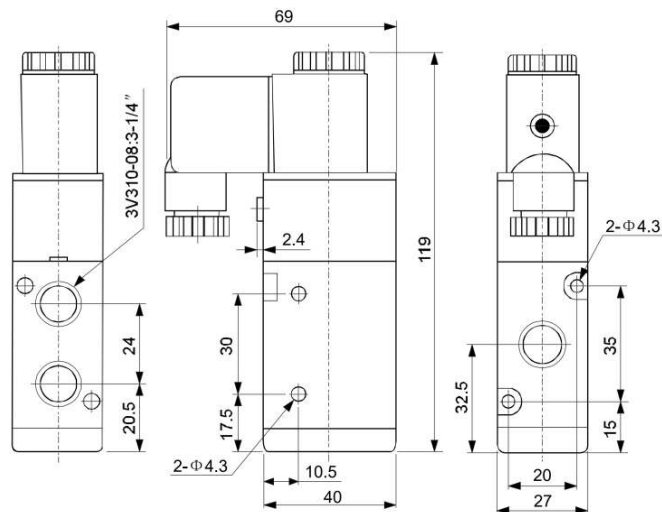

3V 410-15



Dijagram protoka

